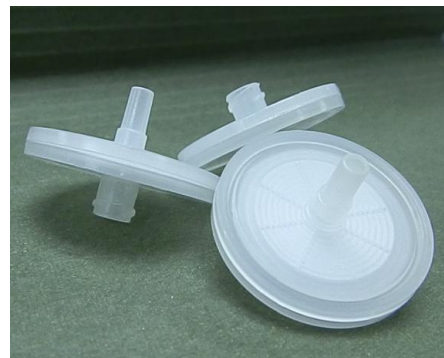


Product PN	FJ25BNPPV002AD01, FJ25BNPPV004AD01, FJ25BNPPV002AH01, FJ25BNPPV004AH01	Mod. 984
Description	25 mm ABLUO Syringe Filters w/Polyvinylidene Fluoride (PVDF)	Rev. 02



25 mm ABLUO, Polyvinylidene Fluoride (PVDF)

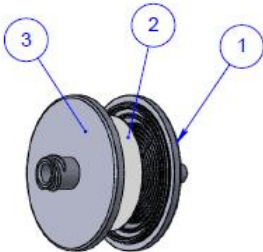
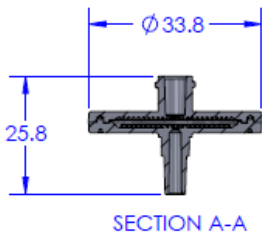


PRODUCT DESCRIPTION	Non-sterile 25 mm syringe filter made of Polypropylene housing, assembled with various pore sizes of Polyvinylidene Fluoride (PVDF) Membrane						
	Membrane Material	Pore Size (um)	End Fitting	Color	Housing Material	Packaging	Product Code
	Polyvinylidene Fluoride (PVDF)	0.22	FLL/MLS	Transparent	Polypropylene	500/pk	FJ25BNPPV002AD01
	Polyvinylidene Fluoride (PVDF)	0.45	FLL/MLS	Transparent	Polypropylene	500/pk	FJ25BNPPV004AD01
	Polyvinylidene Fluoride (PVDF)	0.22	FLL/MLS	Transparent	Polypropylene	100/pk	FJ25BNPPV002AH01
	Polyvinylidene Fluoride (PVDF)	0.45	FLL/MLS	Transparent	Polypropylene	100/pk	FJ25BNPPV004AH01
MANUFACTURER NAME	GVS North America 63 Community Drive Sanford, Me 04073 Phone: +1.866.736.1250 eMail: CustomerCareGVSLS@gvs.com - Website: www.gvs.com						
INTENDED USE / APPLICATION	Applications <ul style="list-style-type: none"> Analytical sample preparation Biological fluids Buffer solutions Sterile filtering of tissue culture media Protein aqueous solutions 						
MATERIALS	Filter media: Polyvinylidene Fluoride (PVDF) Frame/Housing Polymer: Polypropylene Color: Transparent Other insert(s): N/A Regulatory Documentation Required: <ul style="list-style-type: none"> <input checked="" type="checkbox"/> Biocompatibility according ISO 10993-1 <input type="checkbox"/> IMDS <input type="checkbox"/> DEHP plasticizer Free and latex free <input checked="" type="checkbox"/> Rohs, Directive 2002/32/CE <input type="checkbox"/> Aging <input checked="" type="checkbox"/> BSE/TSE, directive 2003/32/CE 						

PRODUCT SPECIFICATION



Product PN	FJ25BNPPV002AD01, FJ25BNPPV004AD01, FJ25BNPPV002AH01, FJ25BNPPV004AH01	Mod. 984
Description	25 mm ABLUO Syringe Filters w/Polyvinylidene Fluoride (PVDF)	Rev. 02

	<input checked="" type="checkbox"/> 1907/2006/CE (hazardous substances regulation) <input type="checkbox"/> Dir. 67/548/CE and Reg. 1272/2008/CE (medical sector dangerous substances) <input checked="" type="checkbox"/> Conflict minerals
--	--

PRODUCT CHARACTERISTIC	Membrane Materials: PVDF Membrane Diameter: 25 mm Effective Filtration Area: 4.6 cm ² Housing Diameter: 33 mm Housing Materials: Polypropylene Inlet / Outlet: FLL / MLS Holdup Volume: <100 microliter Maximum Operating Temperature: PP Abluo - 90°C/194°F, Maximum Operating Pressure: 80 psi Sterile: No
PRODUCT SHELF LIFE	When stored under normal storage conditions, this product should be stable for 5 years
STERILIZATION	<input type="checkbox"/> EtO <input type="checkbox"/> Gamma <input type="checkbox"/> Beta <input type="checkbox"/> Steam <input type="checkbox"/> e-beam <input checked="" type="checkbox"/> Not Required
COMPLIANCE	The Quality management system is in compliance with ISO 9001:2008, ISO/TS 16949:2009
DRAWING	<div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;">  <p>1. Male Luer Slip Outlet (ISO 594) 2. PVDF Membrane 3. Female Luer Lock Inlet (ISO 594)</p> </div> <div style="text-align: center;">  <p>SECTION A-A</p> </div> </div> <p style="text-align: right;">All Dimensions are in mm, for ref. only</p>

PRODUCT SPECIFICATION

Product PN	FJ25BNPPV002AD01, FJ25BNPPV004AD01, FJ25BNPPV002AH01, FJ25BNPPV004AH01	Mod. 984
Description	25 mm ABLUO Syringe Filters w/Polyvinylidene Fluoride (PVDF)	Rev. 02

9/25/2019	1	Updated information for 100/PK	Joe DeSisto, Director, Process Engineering 	Kevin Wrigley, Director, Quality 
-----------	---	--------------------------------	---	---

Customer Approval:

We accept this material specification as a part of the agreed terms of delivery

Company name _____

Approved by: _____
 (Name, Function) (Signature)

Date _____
 (Company stamp)

Please send back this document signed for approval. If we will not receive this specification signed, we consider the first order placed as implicit approval.