REFERENCE MATERIAL CERTIFICATE ISO 17034

Certified Reference Material

This certificate is designed in accordance with ISO 17034 and ISO Guide 31. This certified reference material (CRM) was designed, produced and verified in accordance with ISO/IEC 17025, ISO 17034 and a registered quality management system ISO 9001.

Product Name

N-Nitrosodimethylamine (NDMA) 5000 µg/mL in Methanol

Product Code
DRE-GA09011092ME

CAS No.
62-75-9

Mol. Weight
74.0818


Mol. Formula
C2H6N2O

Lot Number
2-H553479ME

Format
Solution

Expiry
2 May 2033

Storage
-18ºC +/- 4ºC

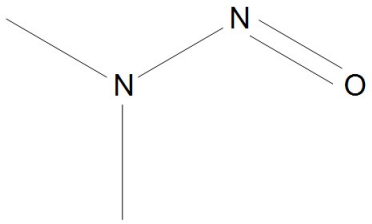

CERTIFIED	CERTIFIED
Concentration	Expanded Uncertainty (U)
5001 ug/mL	77 ug/mL

Uncertainty
The certified value(s) and uncertainty(ies) are determined in accordance with ISO 17034 with an 95% confidence level (k=2). Uncertainty is based on the Total Combined Uncertainty, including uncertainties of preparation, purity of neat materials, homogeneity, long-term stability testing, and transportation stability.


The producer certifies that this reference material meets the specification stated in this certificate until the expiry date, provided it is stored unopened at the recommended temperature herein. Product warranties for this reference material are set out in the terms and conditions of purchase.

CERTIFIED BY	CERTIFIED ON		
Susan Mathews	5 May 2026	Susan Mathews	RM Release

LGC | DR EHRENSTORFER™

REFERENCE MATERIAL CERTIFICATE ISO 17034

CHROMATOGRAM

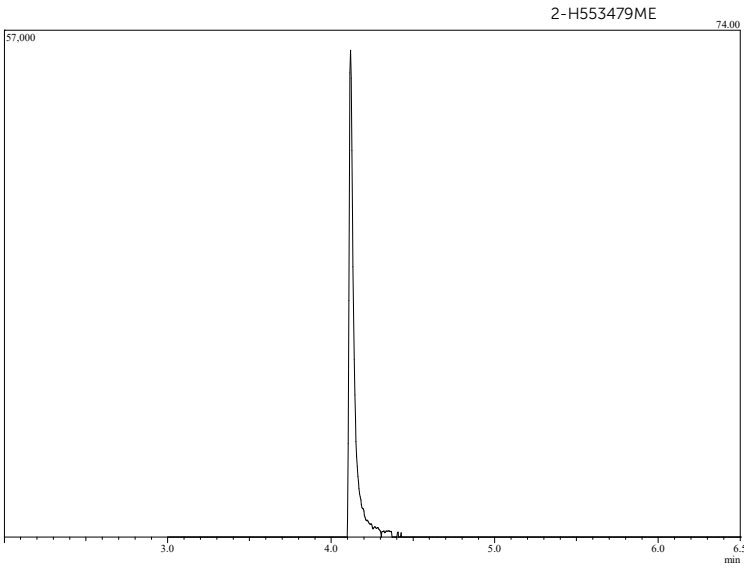

Instrument
GC/MS

Detection
MS

Column/Flow
Phenomenex ZB-Semivolatile
30m x 0.25 mm, ID 0.25 um / 1 mL/min

Method Details

Rate	Temp.(C)	Hold time (min)
	40.0	2.0
10.0	100.0	0.0
15.0	250.0	0.0
20.0	345.0	3.25

Inj.-Vol
1 µL

Method of Preparation

The certified value is based on gravimetric and volumetric preparation of this CRM. This CRM has been confirmed by the appropriate analytical techniques.

Batch Information

Solvent: Methanol, Lot no. 253659-ME, 100 mL

Gravimetric Data

Compound Name	Lot No.	Weight (mg)	Chemical Purity
N-nitrosodimethylamine	57.3.19P	502.60	99.5

Intended Use
This CRM is intended for use in a laboratory as a calibration and quality control standard or in method development for analytical techniques.

Safety
Proper precautions should be observed while handling. See Safety Data Sheet.

Traceability
The balances used for gravimetric measurements are calibrated with weights traceable to the national standards (NIST). The calibration of the balances is verified daily internally and annually by an external accredited calibration service. Chromatographic methods are traceable to the International System of Units (SI).

Homogeneity
Random replicate samples of the final packaged CRM have been analysed to prove homogeneity compliant with ISO 17034.

Storage
The CRM should be stored in the original sealed container at the indicated temperature.

Instructions for use
The CRM should be used shortly after opening to avoid concentration changes due to evaporation. It is recommended to use 1 µL as the minimum sample size. If storage after opening is necessary, it should be transferred to an amber vial with minimum head space and a Teflon-lined silicon septum. If handled as recommended, use period after opening is a maximum of 240 days for an estimated 5% drift in concentration as a result of analyte and/or solvent transpiration. Visit the support section of our website lgcstandards.com for a series of Dr. Ehrenstorfer Tech Tip videos and frequently asked questions.

LGC Group
7290-B Investment Drive
North Charleston, SC 29418
United States
T | +1 843 763 4884
F | +1 866 509 5146
E | dr.ehrenstorfer@lgcgroup.com

The producer of this reference material is registered to ISO 9001:2015 under 56 100 19560019 by TUV USA and accredited to ISO 17025:2017 and ISO 17034:2016 by A2LA with the accreditation numbers 3031.01 and 3031.02.

A2LA ACCREDITED

ISO 17034 Accredited
Reference Material Producer
Cert. No. 3031.02